

ServoWorks™ CNC:


*Ultimate PC-Based,
Truly Open-Architecture
Soft CNC Solutions*

Powerful
PC-Based
Affordable
Scalable



Soft Servo
SYSTEMS, INC

Complete PC-based solutions for critical CNC requirements

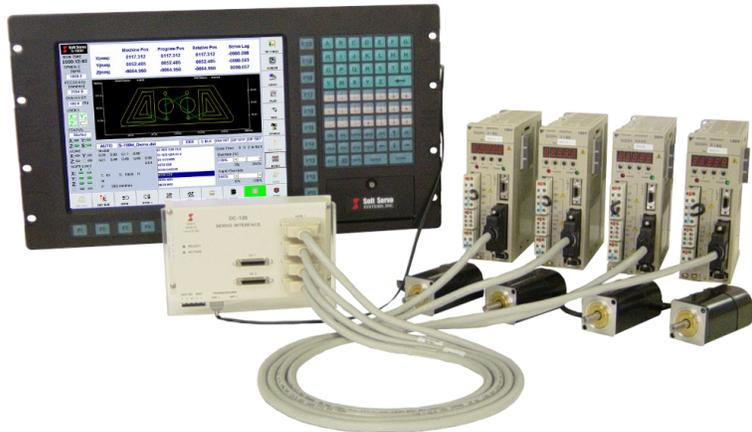

Soft Servo's ServoWorks™ CNC Product Line

Soft Servo Systems offers the following CNC products based on ServoWorks™ soft CNC technology:

- ServoWorks S-100M, S-120M, and S-140M for mills and machining centers
- ServoWorks S-100T and S-120T for lathes

LadderWorks PLC, for integrating soft PLC with CNC, is bundled with all our ServoWorks CNC products. ServoWorks MotionLite, a free utility for servo configuration, tuning and testing is included with ServoWorks S-100M, S-120M, and S-140M. (ServoWorks S-100T and S-120T has its own servo configuration, tuning and testing functions.)

Soft Servo Systems also offers extensive software development tools for developing customized ServoWorks solutions.

ServoWorks™: Unique Soft CNC Technology

All of Soft Servo Systems' CNC products are based on ServoWorks, our unique and proprietary PC-based motion control software technology. ServoWorks uses a single host CPU to perform all real-time servo and CNC tasks, including feedback loops, accelerations/decelerations, multi-axis coordination, G code processing, NC path generation and PLC, as well as providing the graphical user interface, program interpreting/loading, file management, data processing and network communications, all simultaneously.

ServoWorks CNC controllers run on top of the core ServoWorks software on Windows XP or Windows 7, with a real-time kernel.

Several servo communications platforms are available for off-the-shelf ServoWorks CNC products: EtherCAT, MECHATROLINK™ II, and MECHATROLINK™ III.

Advantages of ServoWorks CNC Technology:

Powerful and High Performing

Unique soft CNC motion and soft CNC technology fully exploits the powerful and relatively inexpensive CPUs in personal computers to provide superior, incomparable CNC performance, allowing customers to increase productivity and reliability.

ServoWorks makes full use of the super-fast, super-precise (double-precision floating point) computation power of ordinary PCs, computation power which, until recently, was available only with a supercomputer. The ServoWorks CNC Engine provides customers with superior axis motion control performance. Our technologically advanced, multi-axis servo loops deliver ultra fast and accurate motion control. These servo loops are entirely closed in the CPU, and are optimized with velocity feedforward, backlash compensation, leadscrew pitch error compensation, linear scale feedback compensation, corner deceleration control, smoothing, interpolation and more.

Soft motion and soft PLC are integrated into a single motion/machine control application which gives customers incomparable motion and machine control.

ServoWorks CNC products support many modes of motion and are filled with functions and features, so that you will be able to produce high-quality parts quickly, easily and reliably.

Affordable and Innovative

PC-based technology enables users to take advantage of the ever-improving CPUs in personal computers to improve the performance of their systems.

ServoWorks products easily handle computation-heavy algorithms without additional expensive processors. All high-performance, multi-axis servo loops are entirely closed in software, eliminating the need for expensive plug-in motion control boards.

A unique and open architecture significantly reduces complex interface wiring and hardware requirements, and eliminates the need for high-priced proprietary encoder- or servo-specific interface modules, breakout boxes, complex interface wiring, and analog and encoder cables from the PC. The EtherCAT interface system is a zero hardware system, and MECHATROLINK systems use only PC adapter boards.

Setup, integration and maintenance are simple and fast, further reducing cost and time to market. Simple cabling and connections for all communications platforms minimize maintenance and total cost of ownership.

Customizable

It's easy to customize a ServoWorks CNC system to meet your exact motion control needs.

Because our soft motion technology is based on open architecture, customers can design and program motion applications with a comprehensive software development kit, making it easy to design and program customized ServoWorks CNC applications, taking full advantage of ServoWorks soft motion technology. Or you can purchase one of our many user-friendly CNC products.

ServoWorks CNC solutions are Windows-based (with a real-time extension), allowing customers to take advantage of sophisticated user interfaces, connectivity to enterprise networks, off-the-shelf PC technology, and integration with third-party Windows-based software, such as vision systems or statistical process control software.

Scalable and Flexible

ServoWorks products are designed to provide customers with exactly the number of axes to be controlled and the I/O capabilities required.

A handwheel can be included or excluded from your system. Soft Servo Systems offers an easy-to-operate handwheel, or customers can provide their own.

Mouse, keyboard and/or touch screen are all optional parts of a ServoWorks CNC system.

Our soft motion technology can be paired with one of six different interface platforms for servo drives and I/O communications, depending upon needs, to provide a solution that is right for you.

Powerful

Affordable

Customizable

Scalable



Features and Specifications of the ServoWorks CNC Family of Products

||| Servo Features

- Complete dual-axis synchronous control (except ServoWorks S-100M, S-100T, and S-120T)
- PID control
- Velocity feedforward
- Servo alarms
- Protective features
- Actual velocity measurement

||| Macro Features

- 99 local variables
- 400 numbered global variables (their values are lost when the control restarts)
- An unlimited number of symbolic global variables, with meaningful variable naming (such as "#position")
- 500 numbered permanent variables (their values remain when the control restarts)
- Up to 24,000 system variables (depending upon the number of axes, tool offsets, workpiece coordinate offsets, etc.)
- Extensive math operations:
 - Addition, subtraction, multiplication, division (+, -, *, /)
 - Sin, cos, tan, asin, acos, atan
 - Exponent, square root, absolute value
 - Rounding off, rounding down, rounding up
 - Natural logarithm, exponential function
 - OR, XOR, AND, NOT
 - Unlimited nesting of parenthesis
- Branching and repetition statements supported: GOTO, IF GOTO, IF THEN, IF ELSE ENDIF, WHILE
- Unlimited nesting of branching and repetition statements
- Macro calls using custom G, M, S and T codes

||| Part Program Storage and Editing

- Windows standard file management
- Storage of part programs is only limited by the size of your PC's internal hard disk
- Unlimited file size text editor
- Read from and write to your PC's flash drive or PCMCIA card—whatever your PC includes for storage
- Save and load programs over a LAN through the Ethernet

||| Supported Operational Features

- High-speed block processing of up to 1000 blocks / sec
- Single block
- Optional block skip
- Dry run
- PLC axes
- Modes of motion include jogging, manual jogging with an optional handwheel, and rapid positioning
- Individual axis machine lock
- Individual axis and individual direction (forward and reverse) interlock (ServoWorks S-100T, S-120T)
- Handwheel feed interruption
- Manual intervention and return with manual absolute function
- Cycle start, cycle stop/feed hold
- Program stop (M00)
- Optional stop (M01)
- Program rewind (M30)
- Subprogram call from a main program (M98)
- End of subprogram and return to main program (M99)
- Emergency stop
- Overtravel limits (hardware limit switches and software stroke limits)
- Machine, workpiece, local and relative coordinates
- Standard STMB functions
- Three homing types

||| Display Features

- Simple, user-friendly colorful GUI — will seem familiar because it is Windows-based
- Full-screen single window with static display areas, permanently anchored toolbars and easy-to-use soft buttons for giving commands and accessing information
- Displays position data, plot, I/O status, servo status, NC status and motion monitoring
- Real-time program execution, position display and plotting
- Real-time I/O, servo, NC status and motion monitoring
- Data display is configurable on-the-fly, in terms of what position types are displayed

||| User-Friendly Operation

- All of our controllers were designed with both the machine operator and the machine integrator in mind, to be up and running quickly
- Soft Servo's products have been thoroughly tested by end users. Their feedback has been incorporated throughout the design process and continues to be an invaluable resource as we constantly improve our software.

Feed Features

- Maximum positioning speed: 300 M/min
- High speed cutting function (maximum cutting feedrate: 60 M/min)
- Dwell
- Manual feed with an optional pulse generator: x1, x10, x100, x1000 (except ServoWorks S-100T, and S-120T which has x1, x10 and x100)
- Rapid traverse override (0 – 100%)
- Manual feedrate override (ServoWorks S-100T/S-120T: 0 – 230%, all other ServoWorks CNC products: 0 – 254%)
- Per minute feed and per revolution feed

Axis Motion Control Performance

- Up to 8 axes of coordinated motion control — number of axes depends on the ServoWorks CNC product.
- Linear interpolation
- Circular interpolation
- Helical interpolation (ServoWorks S-100M Series)
- Exponential interpolation (ServoWorks S-100M Series)
- Cylindrical interpolation (ServoWorks S-100M Series)
- Polar coordinate interpolation (ServoWorks S-100T series)
- Electronic gearing—one gearing ratio per axis
- Least input increment and accuracy: 1E–9 mm / 1E–10 in. (0.000000001 mm / 0.000000001 in.)
- Smoothing: acceleration and deceleration can be programmed for linear, bell-shaped and exponential filters
- Velocity feedforward to improve motion performance
- Backlash compensation
- Leadscrew pitch error compensation
- Linear scale feedback control
- Corner deceleration control for sharper corners while maintaining high feedrates away from corners
- 1000 cycle three-dimensional dynamic look-ahead contour control (3D-DLACC) with pre-interpolation acceleration for high-speed, high-precision machining (ServoWorks S-100M Series)

Integrated Soft PLC

- Ladder logic
- 0.07 μ s/step (Pentium IV 2.4 GHz)
- Max 40,000 steps
- User-friendly ladder editor
- Real-time ladder monitor and time chart
- E-mail and telephone alert

Interface Features

- Simple and intuitive Windows-based HMI — easy to learn and easy to use
- Icon- and soft keys-based operation for manual data input: full-screen, single-window colorful graphical user interfaces with static display areas, permanently anchored toolbars and easy-to-use soft buttons, for giving commands and accessing information
- Auto Mode: real-time monitoring of G-code execution, with a part counter and a cycle timer
- 800 user configurable alarm messages programmable through PLC
- Password protection for parameter settings
- Easy connection of equipment to business-oriented applications running on the network
- Each ServoWorks CNC Windows HMI application can be fully customized by using the ServoWorks Development Kit (SDK)

Host PC Requirements

- CPU:
 - Minimum: Intel® Core™ 2 Series, Intel® Core™ i Series, or equivalent
 - Suggested and minimum for 3D-DLACC (three-dimensional dynamic look-ahead contour control): Core i Series or faster
- RAM: 1GB
- Hard disk space: 500 MB
- Operating system: Windows 7 32-bit
- Ethernet connection: 10 MB/sec or 100 MB/sec
- PCI slot(s), depending on the servo platform and hardware options
- Display:
 - 256-color graphic adapter
 - Color monitor capable of 1024 x 768
 - Recommended video chips: AMD or nVidia
 - Video chips that are incompatible with Soft Servo Systems' products: S3, SMI Lynx, Trident and VIA, and any chips integrated with the above.

NOTE: Depending upon your servo interface system, the location of the PCI slot of your PC adapter card(s), the location of the motherboard slot, and the hardware and software configuration, there is the potential that some PC functions might have to be disabled due to IRQ conflicts. These functions include, but are not limited to: USB, Ethernet, sound, modem, and some hardware components.

Soft Servo Systems recommends consulting with our sales staff prior to purchasing a PC for your Soft Servo Systems product.



The S-100M™ Series: Complete CNC Solutions for Mills

Overview

These innovative PC-based industrial CNC controllers are for three-, four-, five- or seven-axis mills and machining centers; laser, plasma and waterjet cutting machines; EDM machines; grinding and shearing machines, etc. This series includes four products that encompass a wide range of multi-axis solutions:

ServoWorks Product	Spindle Axis	Number of coordinated CNC axes	Number of PLC axes or synchronous control axes	TOTAL AXES
S-100M	✓	3	0	4
S-120M	✓	4	3	8
S-140M	✓	5	2	8

CNC Milling Functions

- 3 axes (S-100M), 4 axes (S-120M), or 5 axes (S-140M) simultaneous control, plus a C axis (spindle) for tapping and positioning capability
- Rigid tapping
- Split (dual) axis for gantry type control (except S-100M)
- Corner deceleration control for sharper corners while maintaining high feedrates away from corners
- 1000 cycle three-dimensional dynamic look-ahead contour control (3D-DLACC) with pre-interpolation acceleration for high-speed, high-precision milling [VersioBus II interface system: 1 second look-ahead for 1 ms position feedback rate]
- High-speed / high-precision machining: 60 m/min (2400 in/min)
- Complete drilling and boring canned cycles

PLC Features

- PLC axes for independent, individual positioning (except S-100M)
- Integrated soft motion and soft PLC (ideal for high-speed milling or high-speed cutting)
- Includes LadderWorks PLC (see page 13)
- 800 user configurable alarm messages programmable through PLC

Product Features

- Macro functions (see page 4)
- Complete dual-axis synchronous control (except S-100M)
- Provides powerful, automatic execution of motion (part) programs, processing up to 1000 blocks per second
- Linear scale feedback control
- 6 workpiece coordinate systems
- Maximum positioning speed: 300 M/min
- Operates with or without a touch panel
- Can be used with a manual pulse generator (handwheel)
- Includes the ServoWorks MotionLite application for servo setup, configuration and tuning (see page 13)
- Can operate on the EtherCAT, VersioBus™ II, Panasonic Realtime Express™, MECHATROLINK™ or CANopen communication platforms
- Available for GUI display in English, Japanese, Korean, Simplified Chinese or Traditional Chinese

Spindle Control Features

- Manual spindle control
- Spindle CW (M03) and spindle CCW (M04)
- Spindle stop (M05)
- Spindle speed override (50 – 120%)
- Actual spindle speed measurement and display
- Spindle orientation
- C axis control

Tool Compensation Features



- Tool offset compensation: geometry and wear offsets
- 256 pairs of tool offsets
- Automatic tool length compensation calibration

Manual NC modes:

- (1) Jog Continuous Mode
- (2) Jog Incremental Mode
- (3) Rapid Mode
- (4) MDI Mode (manual data input)
- (5) Home Mode
- (6) HandWheel Mode (manual jog with a pulse generator)
- (7) Spindle Mode

Supported G Codes

G00	Rapid positioning	G52	Local coordinate system selection
G01	Linear interpolation	G53	Machine coordinate system selection
G02	Clockwise circular or helical interpolation	G54-G59	Workpiece coordinate system 1–6 selection
G03	Counterclockwise circular or helical interpolation	G54.1	Additional workpiece coordinate system selection
G02.3	Positive exponential interpolation	G61	Exact stop check mode
G03.3	Negative exponential interpolation	G64	Continuous cutting mode
G04	Dwell	G64.1	Continuous cutting mode with block rollover
G05/G08	Dynamic look-ahead contour control on / off	G65	Simple macro call
G10	Program data input	G68	Coordinate system rotation
G17	XY plane selection	G69	Coordinate system rotation cancel
G18	ZX plane selection	G73	High speed peck drilling cycle
G19	YZ plane selection	G74	Counter tapping cycle
G20	Inch data input	G76	Fine boring cycle
G21	Metric data input	G80	Canned cycle cancel
G28	Automatic return to the reference point	G81	Drilling cycle, spot boring
G29	Automatic return from the reference point	G82	Drilling cycle (dwell)
G30	Automatic return to the 2 nd , 3 rd and 4 th reference points	G83	Peck drilling cycle
G31	Skip cutting	G84	Tapping cycle
G37	Automatic tool length compensation calibration	G85	Boring cycle
G40	Tool radius compensation (TRC) cancel	G86	Boring cycle (spindle stop)
G40.1	Normal direction control cancel	G87	Back boring cycle
G41	Tool radius compensation (TRC) left	G89	Boring cycle (dwell)
G41.1	Normal direction control left	G90	Absolute command programming
G42	Tool radius compensation (TRC) right	G91	Incremental command programming
G42.1	Normal direction control right	G92	Workpiece coordinate programming
G43	Positive tool length compensation	G94	Feed per minute mode
G43.2	Tool center point (TCP) control	G95	Feed per revolution mode
G44	Negative tool length compensation	G98	Return to initial point in canned cycle
G49	Tool length compensation cancel/TCP cancel	G99	Return to R point in canned cycle
G50	Scaling off	G310	Linear interpolation feedrate include rotary axes
G50.1	Mirror image off	G311	Linear interpolation feedrate exclude rotary axes
G51	Scaling on		
G51.1	Mirror image on		

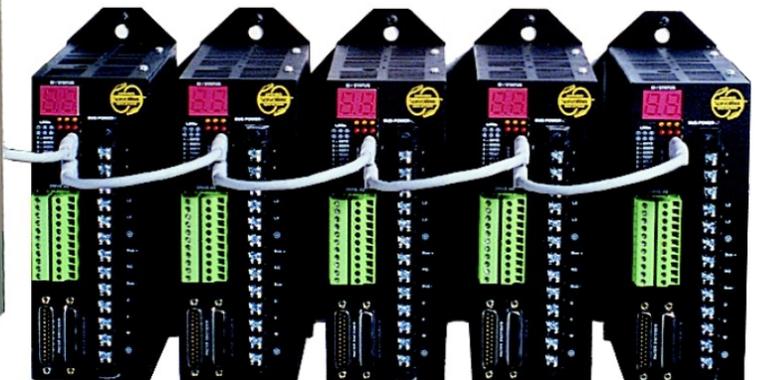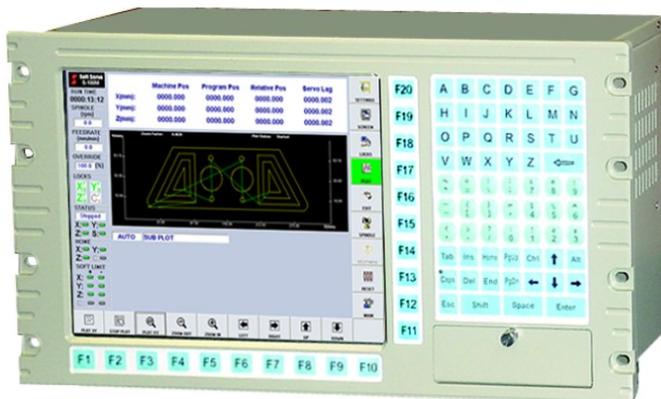


Servoworks S-140M™ : Shape Cutting Capabilities & Features

Overview

ServoWorks™ S-140M™ are ideal for many shape cutting applications: laser cutting, plasma cutting, diamond glass cutting, oxy-fuel cutting and waterjet cutting machines.


Tool Center Point (TCP) Control

- Compensates for the distance between the actual tool position (i.e. the tip of the nozzle) and the tool center point (the theoretical tool position) — the program position is actually shifted to account for the tool center point, as opposed to compensating each actual movement command in the part program.
- The actual trajectory of G code is applied to the tool center point, and the tool center point acts independently from axis movement or angle movement. The tool center point moves at the feedrate specified by the part program, along the path specified by the part program.
- Simplifies the programming of complex workpieces.

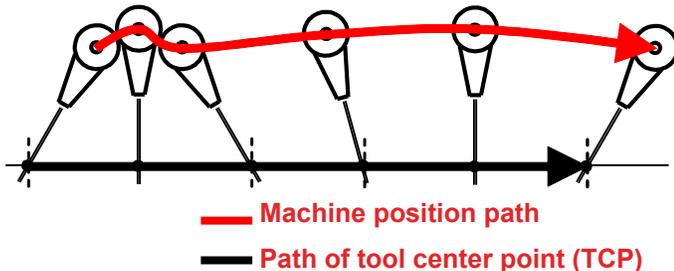

Corner Deceleration and Velocity Control

- Creates sharper corners while maintaining high feedrates away from corners
- For a each “corner” (specified by a user-defined angle), the cutting feedrate near the corner is automatically decelerated to a user-specified corner feedrate to increase the working accuracy to that of low feedrate processing. The user can specify whether or not to perform an in-position check at each corner, to further increase accuracy.

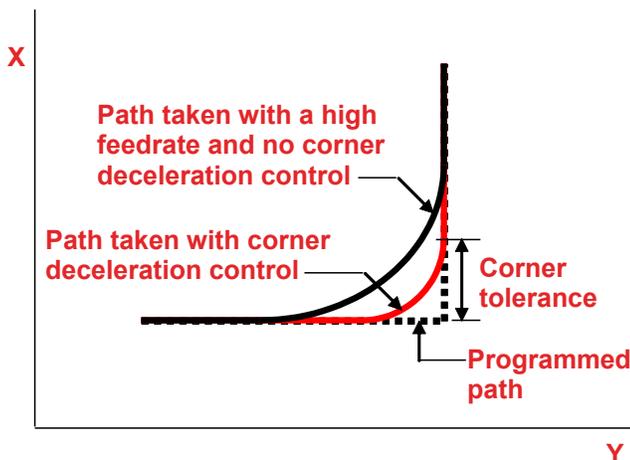

Block Search

During part program execution, you can use the “block search” function to search for a specific block based on a sequence number (N), a tool number (T) or an M code (M), and then restart execution from that block.

This block search is not a simple text search; rather it is a more useful “search with calculation” that extracts data from each previous block before checking to see if the current block is the target block. While searching the part program line by line for the target block containing the specified N, T or M number, ServoWorks S-140M also runs the part program line by line, and tracks the location of each axis. In this way, for each line of code in the part program, the current modal information for each G code group, the current T code, feedrate, macro parameters, etc. are maintained.

This is comparable to running ServoWorks S-140M in Simulation Mode, except that no tool movement is simulated on the screen. No tool movement occurs while this “search with calculation” continues.

Upon reaching the target block, ServoWorks S-140M moves each axis to a reentry position — its programmed position just prior to this block (the programmed position has been continuously updated during the block search), and then continues execution of the part program beginning with the target block.

This complicated algorithm allows you to start execution at the target block, with all the “knowledge” (data) of what transpired in all of the previous blocks.

Quadrant Protrusion Compensation


- Optimizes cutting precision by preventing protrusions and unevenness due to lost motion when an axis reverses motion
- Applies to circular compensation and “V” shape cutting

Straightness Compensation

- Compensates for a lack of straightness along the total length of an axis
- Compensates for the lack of squareness between axes


Normal Direction Control and Bevel Cutting

- A tool with a rotation axis can be controlled so that it is kept constantly perpendicular to the tool path, as the tool moves in the X-Y plane.
- ServoWorks S-140M calculates the required geometry modifications to apply to tool movement, to keep the tool normal to its path at all times.
- Ideal for clean and functional bevel cutting and chamfering, particularly rotary bevel cutting.
- Greatly simplifies the programming of the beveled shapes and chamfers that are common in plasma cutting and fuel cutting applications.

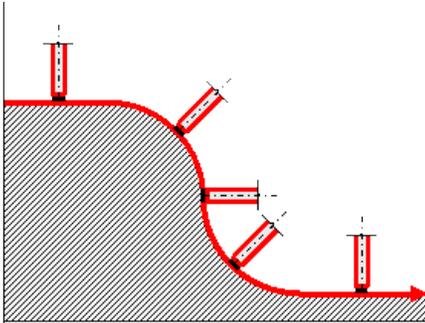

Retrace Function


There are many reasons that the CNC may continue to move even if cutting is no longer taken place: a piece may be left uncut due to an unstable plasma emission process or an uncertain workpiece thickness, or the garnet running out on the waterjet or your gas going off. With a complicated shape, it's difficult to manually reverse and move backwards along the cutting path to fix this problem. With the retrace function, though, you can stop the cycle, move the tool in the reverse direction with the "RETRACE" button, retrace the programmed path up to the last 200 blocks, and then move the tool forward again along the retraced path.



1. CNC cutting begins. The dashed path indicates that the CNC still moves, but no cutting occurs; the operator notices, and presses the "RETRACE" button.



2. The CNC reverses direction and follows the reverse path until the operator presses the "RETRACE" button again.



3. CNC cutting continues along the original path and executes the remainder of the part program.

Velocity Control in Circular Interpolation

Automatically adjusts (reduces) circular interpolation speed according to the circle radius and the maximum allowable machine acceleration/ deceleration, to meet the specified trajectory accuracy.

Macro Variable Display

- View up to 20 macro variable values at one time (global, permanent or system variables)
- Useful for tracking tool length or radius compensation values (either wear or geometry)

ServoWorks™ S-100T™ & S-120T™: An Advanced CNC Solution for Lathes

Overview

ServoWorks™ S-100T™ is a unique PC-based CNC controller for lathes, providing 2-axis motion control with a spindle, or 3-axis motion control including a C axis. ServoWorks™ S-120T™ adds one additional axis, providing 3-axis motion control with a spindle, or 4-axis motion control including a C axis.

This industrial CNC solution supports all standard lathe operational functions and features, including indexing, plus live tools and all-axes simultaneous interpolation with a spindle (C axis). High performance CNC functionality and productivity allow customers to produce complex and precise parts quickly and easily.

Standard CNC Lathe Functions

- Drilling
- Chamfering
- Profiling
- Indexing
- Grooving
- Boring
- Cutting
- Multi-pass threading

C-Axis Control and Live Tool Features

- Full interpolation of X, Z and C axes
- Cylindrical interpolation
- Polar coordinate interpolation
- Face drilling
- Face tapping
- Face boring
- Side drilling
- Side tapping
- Side boring
- End face cutting cycle

Product Features

- Macro functions (see page 4)
- Provides powerful, automatic execution of motion (part programs, processing up to 1000 blocks per second)
- Workpiece coordinates (one external zero offset and 6 workpiece coordinate systems)
- Maximum positioning speed: 300 M/min
- Maximum cutting function: 60 M/min
- Operates with or without a touch panel
- Can be used with a manual pulse generator (handwheel)
- Can operate on the EtherCAT, VersioBus™ II, Panasonic Realtime Express™, MECHATROLINK™ or CANopen communication platforms
- Available for GUI display in English or Simplified Chinese

Spindle Control Features

- Manual spindle control
- Spindle speed override (50 – 120%)
- Constant surface speed control (CSS)
- Actual spindle speed measurement and display
- Spindle gear change — supports up to 4 gear stages
- Spindle speed check

Tool Compensation Features

- Tool offset compensation: geometry and wear offsets
- 99 pairs of tool offsets
- Easy tool offset measurement: no calculations needed
- Tool nose radius compensations

Manual NC modes:

- (1) Jog Continuous Mode
- (2) Jog Incremental Mode
- (3) Rapid Mode
- (4) MDI Mode (manual data input)
- (5) Home Mode
- (6) HandWheel Mode (manual jog with a pulse generator)
- (7) Spindle Mode

Additional Interface Features

- On-line, interactive part program editing
- Graphical G-code input and editing facilitates part program creation

PLC Features

- Integrated soft motion and soft PLC
- Includes LadderWorks PLC (see page 13) [NOTE: LadderWorks Console, a Win32 application for ladder sequence program editing, is not included with ServoWorks S-100T at this time.]



Supported M Codes

M00	Program stop
M01	Optional stop
M02	Program end
M03	Spindle CW
M04	Spindle CCW
M05	Spindle stop
M08	Coolant on
M09	Coolant off
M10	Chuck unclamp, collet open
M11	Chuck clamp, collet close
M19	Indexing (spindle orientation)
M20	Indexing (spindle rotation mode)
M30	Program end and rewind
M50	Live tool #1 on
M51	Live tool #1 off
M52	Live tool #2 on
M53	Live tool #2 off
M54	Live tool #3 on
M55	Live tool #4 off
M98	Subprogram call from a main program
M98	Return to main program from a subprogram, or return to beginning of main program (if used in the main program)

Plus up to 82 customizable M codes through PLC

Supported G Codes

G00	Rapid positioning
G01	Linear interpolation
G02	Clockwise circular interpolation
G03	Counterclockwise circular interpolation
G04	Dwell
G09	Exact stop check
G10	Program data input
G20	Inch data input
G21	Metric data input
G22	Barrier check on
G23	Barrier check off
G25	Spindle speed fluctuation detection off
G26	Spindle speed fluctuation detection on
G28	Automatic return to the reference point
G29	Automatic return from the reference point
G30	Automatic zero return to 2 nd , 3 rd , 4 th reference points
G32	Thread cutting with a constant lead
G40	Tool nose radius compensation cancel
G41	Tool nose radius compensation left
G42	Tool nose radius compensation right

G50	Coordinate system preset and maximum spindle RPM
G52	Local coordinate preset
G53	Machine coordinate system selection
G54-G59	Workpiece coordinate system 1-6 selection
G61	Exact stop check mode
G64	Continuous cutting mode
G65	Simple macro call
G70	Finishing cycle
G71	Stock removal in turning
G72	Stock removal in facing
G73	Pattern repeat cycle
G74	End face peck drilling/grooving
G75	Outer diameter/inner diameter grooving
G76	Multiple-pass threading cycle
G80	Hole machining canned cycle cancel
G83	Face drilling cycle
G84	Face tapping cycle
G85	Face boring cycle
G87	Side drilling cycle
G88	Side tapping cycle
G89	Side boring cycle
G90	Outer diameter/inner diameter cutting cycle
G92	Thread cutting cycle
G94	End face cutting cycle
G96	Constant surface speed control set
G97	Constant surface speed control cancel
G98	Per minute feed
G99	Per revolution feed
G107	Cylindrical interpolation
G112	Polar coordinate interpolation mode set
G113	Polar coordinate interpolation mode cancel
G164	Continuous cutting mode with block rollover

The screenshot displays a CNC control interface with the following sections:

- Top Left:** Cycle Time (00:00:32), Spindle (rpm) (1900.0), Feedrate (inch/min) (110.9), Locks (X, Z), Servo (Run), and Home (X, Z).
- Top Center:** Program Pos (inch), Machine Pos (inch), Actual Pos (inch), and Dist To Go (inch) for X, Z, and C axes.
- Top Right:** Control buttons: WP C/C, OFFSET, SCREEN, LOCKS, PLOT, EDITOR, RESET, MAIN.
- Center:** A graphical plot of a part with a zoom factor of 1.721. The plot shows X and Z coordinates.
- Bottom Left:** Modal (G71, G00, G96, G99, G20, G40, G25, G23, G80, G63, G64), Override (MF, RP, SS), and Overtravel (+, X, Z) controls.
- Bottom Center:** Feed Override (%) and Rapid Override (%) controls.
- Bottom Right:** Program data (M: 08, T: 0101, B: 00; S: 500.0 ft/min; F: 600.0000 ipm) and a list of tool numbers (S1, S2, S3).
- Bottom:** A row of function buttons: NC FILE, DRY RUN, OVRD, OVRD+, RPO-, RPO+, REW/FF, MORE, START, STOP.

MotionLite™: Friendly & Free Servo Configuration, Tuning & Testing

Overview


ServoWorks™ MotionLite™, included with ServoWorks S-100M™, S-120M™, and S-140M™, is a free utility application for setup, configuration, servo tuning and testing of ServoWorks S-100M, S-120M, and S-140M systems. It can also be used for simple motion control to verify the system. MotionLite controls up to 16 axes, 4 axes at a time, with real-time monitoring of motion and I/O status.

Interface Features

- Incorporates simple and intuitive menu- and tab-driven HMI that is easy to learn and easy to use
- Manual NC modes:
 - (1) Jog Mode
 - (2) Position Mode (4-axis coordinated linear interpolation)
 - (3) HandWheel Mode (manual jog with a pulse generator)
 - (4) Block Buffer Mode (consecutive execution of blocks of code in a block buffer, for continuous motion)
- Test Mode: tuning of the ServoWorks system including velocity frequency/step response and position frequency/step response, in either sinusoidal or square wave

Comprehensive Setup, Configuration, Servo Tuning and Testing Features

- Includes ServoWorks CNC system setup and configuration functions, such as driver installation, FPGA initialization, setting of servo control and servo drive parameters, etc.
- Includes test operation modes for ServoWorks CNC system tuning such as velocity frequency/step response and position frequency/step response in either sinusoidal or square wave
- Interactive manual PID tuning
- Enhanced data sample and plot utilities (including continuous plot), for a lively visualization of system performance

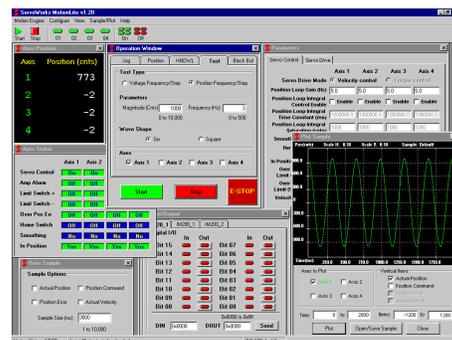


LadderWorks™ PLC: A Complete Soft PLC Package

Overview

LadderWorks™ PLC is an independent PLC package included with all ServoWorks CNC products.

LadderWorks Console

- Win32 application for creating, importing, editing, monitoring, debugging and compiling PLC sequence programs
- Quickly insert functional commands by selecting functions from a pull-down menu, and entering parameters (if any) in pop-up text boxes; insert basic instructions by pointing and clicking on symbols within the easy-to-use GUI
- View Ladder Diagram (LD) or Instruction List (IL) format
- Search and print ladder diagrams
- Force component values while monitoring sequence programs



LadderWorks PLC Utilities for Debugging

- PLC Bit Pattern Utility — provides the current bit pattern for any signal address (F, G, X or Y data)
- PLC Time Chart Utility — shows the history of any specified bits in any signal addresses


LadderWorks PLC Engine

- Real-time soft PLC engine for industry-standard ladder logic control and execution of PLC sequence programs
- Provides control of axis modules — independent and individual positioning of PLC axes — useful for part feeders, tool changers, etc. (ServoWorks S-120M and ServoWorks S-140M)
- Seamlessly integrated with the ServoWorks CNC Engine into a single motion/machine control application providing uniform API functions
- Operates with Fanuc-compatible ladder logic
- Includes up to 416 opto-isolated I/O points for the VersioBus II interface system
- Provides deterministic, real-time performance
- Operates with a 5 msec standard scan time (8 msec for ServoWorks S-100T)
- Recognizes 38 function blocks and 12 basic commands, simplifying the programming of complex machine functions and allowing for quick and easy creation of sequence programs
- 100 bytes each for X and Y addresses
- 400 bytes each for F and G addresses

Servo Communications Platforms


III The MECHATROLINK II Interface System

- Yaskawa's MECHATROLINK™ II (10 Mbps) for high-end digital servo and I/O network — reliable, versatile and economically efficient
- Market-leading, high-performance servo system
- All-digital, minimal-hardware control architecture
- Works with the Yaskawa family of digital servo systems (Sigma II, Sigma III or Sigma V series servo drives), inverters and I/O modules, as well as any MECHATROLINK-compatible devices from other companies
- Up to 30 stations can be integrated in one network, using a single, shielded twisted pair interface cable
- Low cost, high noise immunity transmission
- Data transfer rate: 10 Mbps
- 4 ms to 30 ms cycle times for up to 30 stations

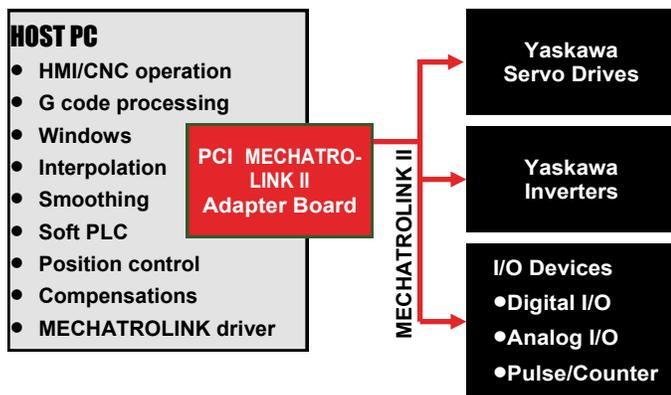


III The MECHATROLINK III Interface System

- Yaskawa's MECHATROLINK™ III Ethernet-based digital servo communications technology
- Integrates up to 62 stations in one network, using a single Ethernet interface cable
- Data transfer rate: 100 Mbps (ten times faster than MECHATROLINK II)
- Works with the Yaskawa's highly-acclaimed Sigma V series servo drives
- All-digital, minimal-hardware control architecture
- Supports hot plugging servo drives

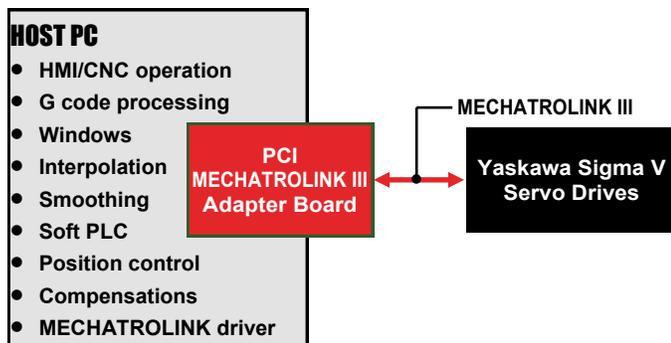

III The EtherCAT Interface System

- A fast, vendor-independent, Ethernet-based realtime open network for servo and I/O communications that works with CANopen over EtherCAT (CoE) servo drives and I/O devices
- Extremely fast — control of up to 32 servo axes with a cycle time as fast as 0.5 ms
- Simple wiring — single-line daisy chain without even a terminator
- Normal, off-the-shelf Ethernet cabling
- Easy to configure, diagnose and maintain
- Less expensive, due to simplified configuration, no plug in cards, no switches/hubs, and standard cabling
- Well proven technology
- Offers redundancy against cable or node failures (with second Ethernet port)
- Servo drives from different manufacturers can be connected in the same network

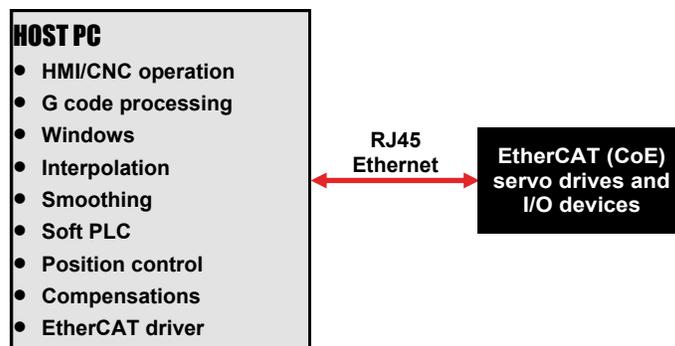

ServoWorks CNC Product Packages

Overview

The following ServoWorks™ CNC products are available for Windows:

- ServoWorks S-100M™
- ServoWorks S-120M™
- ServoWorks S-140M™
- ServoWorks S-100T™
- ServoWorks S-120T™

All ServoWorks CNC products include the following components:

- Windows HMI for each specific ServoWorks CNC product
- LadderWorks PLC, including the real-time LadderWorks PLC Engine and the LadderWorks Console for editing and monitoring PLC sequence programs
- ServoWorks MotionLite, a Windows application for setup and tuning of ServoWorks S-100M, S-120M, and S-140M (not included with ServoWorks S-100T and S-120T)
- Real-time ServoWorks CNC Engine specific to the product
- Real-time ServoWorks G-Code Parser specific to the product
- Real-time kernel for Windows
- Servo interface system: EtherCAT, MECHATROLINK II, or MECHATROLINK III

When ordering, the servo platform must be specified and the corresponding servo interface system will be provided as follows:

EtherCAT Interface System:

- EtherCAT real-time device driver

NOTE: Does not include EtherCAT cables (Ethernet cables).

MECHATROLINK II Interface System:

- One NT110 (PCI) MECHATROLINK II adapter board
- MECHATROLINK II real-time device driver

NOTE: Does not include MECHATROLINK II cables or terminators.

MECHATROLINK III Interface System:

- One NT112 (PCI) MECHATROLINK III adapter board
- MECHATROLINK III real-time device driver

NOTE: Does not include MECHATROLINK III cables or terminators.

||| ServoWorks Development Kit (SDK)*

There are two packages for the ServoWorks Development Kit: a Standard Package and a Premium Package.

SDK Standard Package includes:

- SWAPI (ServoWorks APIs) for the following programming languages:
 - Visual Basic 6.0
 - C/C++
 - .NET 2.0
- Intensive sample source code
- Simulation Engines specific to the product (simulation versions of the ServoWorks CNC Engine, ServoWorks G-Code Parser and LadderWorks PLC Engine)

NOTE: The SDK Standard Package does not include technical support or maintenance, and does not include a real-time kernel for Windows. A real-time kernel for Windows (included with all regular ServoWorks CNC products) would be required to run the Simulation Engines.

SDK Premium Package includes:

- All the items in the SDK Standard Package (above)
- ServoWorks Simulator Package for a ServoWorks CNC product of the user's choice
- Annual software maintenance for the first year
- One-seat technical support (e-mail and phone) for the first year
- One-seat training for SDK programming (two days)

* An SDK is available and different for each ServoWorks CNC product. A ServoWorks application to be developed by an SDK for a product would run on the ServoWorks CNC Engine of that product.

||| ServoWorks Simulator Packages

A simulator package is available and different for each ServoWorks CNC product. Each simulator package comes with a Windows HMI, a ServoWorks CNC Engine Simulator, a ServoWorks G-Code Parser Simulator, the LadderWorks PLC Engine and a real-time kernel for Windows.

||| ServoWorks Starter Package

ServoWorks Starter Package includes:

- Two-day technical training at a Soft Servo Systems facility for up to two people
- Annual software maintenance for the first year
- Technical support (e-mail and phone) for the first year

||| Application Source Code

Visual Basic source code for ServoWorks MC-Quad, S-100M, S-120M, S-140M, S-100T, S-120T or MotionLite

||| Single Source CNC Packages with Panasonic MINAS A4N Drives or Yaskawa Drives

Total CNC packages with Panasonic MINAS A4/A5-series servo drives and motors, or with Yaskawa Sigma II, Sigma III or Sigma V servo drives (with a choice of MECHATROLINK II, MECHATROLINK III or VersioBus II servo communications), are available.

Soft Servo Systems has a sales and technical partnership with Matsushita Electric Industrial Co., Ltd., allowing us to offer Panasonic MINAS A4-series servo drives and motors to our customers.

Soft Servo Systems also has a long standing business and technical partnership with Yaskawa Electric Company. This allowed us to be the first company in the United States to offer Sigma III servo drives with MECHATROLINK II servo communications, and one of the first third-party motion control providers of a system combining MECHATROLINK III and Sigma V technologies. These complete and economical CNC solutions for MECHATROLINK interface systems include world wide support.

We constantly work with Matsushita Electric Industrial Co. and Yaskawa Electric Company on providing the best motion control solutions for our customers.

||| Software Options

- Macros for all products (including local, global, symbolic, permanent and system variables; extensive math operations; unlimited nesting of branching and repetition statements; and macro calls using custom G, M, S and T codes)
- Tool center point (TCP) control — compensates for the distance between the actual tool position and the theoretical tool position — the program position is actually shifted to account for the tool center point, as opposed to compensating each actual movement command in the part program [only for ServoWorks S-140M]
- 3D-DLACC, three-dimensional dynamic look-ahead contour control — a highly advanced, highly specialized look-ahead function with pre-interpolation acceleration for high-speed, high-precision machining
- Complete synchronized control for gantry (dual) axes [for ServoWorks S-120M/S-140M]
- C axis for the spindle for ServoWorks S-100T, S-120T
- Cylindrical interpolation for ServoWorks S-120M/S-140M (available soon)
- Rigid tapping for ServoWorks S-100M/S-120M/S-140M [limited to the servo spindle]

Our Software Development Tools Provide Ultimate Flexibility

Overview

Soft Servo Systems provides dynamic CNC solutions designed to meet specific industry needs. All of our products have been tested extensively by end users to ensure that we achieve the highest levels of quality and innovation. Despite all the preparation that goes into our development process, we know there will always be some customers who require something different in their CNC applications. With this in mind, we have made it easy for users to create or customize their own ServoWorks applications in C/C++, Visual Basic 6.0 or .NET 2.0 for Windows 7.

Customers can program their own GUI or text-based ServoWorks application interface in one of two ways:

- (1) By using SWAPI, ServoWorks' extensive Motion Control APIs in the Win32 environment, provided in the form of Visual Basic 6.0, C/C++ or .NET 2.0. APIs are provided for complete and full access to all real-time processes and resources.
- (2) By modifying the source code of any ServoWorks GUI application. We offer source code in Visual Basic, C/C++ and .NET 2.0 for customers to use as a basis for customizing their ServoWorks application. This may be the most efficient way to customize an application to meet exact specific needs.

Users can create a hybrid application of C/C++ and Visual Basic to take advantage of the faster execution time of C/C++ while using Visual Basic to quickly and easily create advanced, professional-looking GUIs.

Soft Servo Systems offers software development tools to facilitate development of customized applications capitalizing on ServoWorks technology: the ServoWorks Simulator and the ServoWorks Development Kit (SDK). We also offer software development services.

||| The ServoWorks Simulator

- Motion control and hardware are simulated in the ServoWorks Simulator without requiring an adapter board for the host PC. Users can “play” with the software without having hardware or motors connected to a PC. For instance, users can “jog” an axis that doesn't exist, and see that “movement” reflected in the display of position data, the plot display, etc.
- The ServoWorks Simulator has three different purposes:
 - (1) **Software Development.** With simulated motion control, developers can quickly test applications under development, without the possibility of damaging hardware or machines.
 - (2) **Training.** New or potential operators can try out ServoWorks applications without worrying about damaging real (and costly) hardware. The ServoWorks Simulator is the perfect vehicle for training operators to use ServoWorks CNC products.
 - (3) **Part Program Verification/Testing.** Programmers can test part programs and view plots created by those plot programs.

||| ServoWorks Development Kit (SDK)

- The ServoWorks Development Kit is a package for software developers who want to create their own, customized motion control applications based on ServoWorks technology and on SWAPI (ServoWorks motion control APIs in the Win32 environment), which forms the core of SWSDK.
- SDK jump-starts users in developing their own customized ServoWorks applications, while taking full advantage of ServoWorks technology quickly and easily.
- SDK comes in two packages: Standard and Premium.

SDK Standard Package includes:

- The following forms of SWAPI:
 - SWAPI Visual Basic 6.0 Module Package—reusable code modules to include in Visual Basic project to make the ServoWorks API functions part of the application
 - SWAPI C/C++ Interface Package, including header files and a library file to include in C or C++ projects
 - SWAPI .NET 2.0 Interface Package
- Intensive sample source code for simple C/C++ and Visual Basic applications — models how to use SWAPI functions
- Simulation Engines specific to the product (simulation versions of the ServoWorks CNC Engine, ServoWorks G-Code Parser and LadderWorks PLC Engine)
- An extensive API reference manual — a complete, organized resource clearly explaining the ServoWorks APIs, making them easy to use in building an application
- An intensive and user-friendly programming manual including an explanation of ServoWorks technology, code examples, and more

NOTE: The SDK Standard Package does not include technical support or maintenance, and does not include a real-time kernel for Windows. A real-time kernel for Windows (included with all regular ServoWorks CNC products) would be required to run the Simulation Engines.

SDK Premium Package includes:

- All items in the SDK Standard Package (above)
- A ServoWorks Simulator Package for one of Soft Servo Systems' CNC products
- Annual maintenance for the first year
- One-seat technical support (e-mail and phone) for the first year
- One-seat training for SDK programming (two days)

Soft Servo Systems, Inc. Corporate Profile

Soft Servo Systems, the leading provider of PC-based motion control products, was founded in February 1998 by MIT professionals with funding from private investors.

Soft Servo Systems was among the first to develop a truly PC-based servo controller in which a single, powerful host computer, combined with FPGA technology, performs all real-time servo control operations. Our products integrate and leverage this servo control with the most advanced information and communication technologies. In addition to handling feedback loops, multi-axis coordination and NC path generation, the computer also provides the graphical user interface, data processing, plant monitoring, network communication, file management, and more.

Soft Servo's soft CNC products are based on our unique and proprietary ServoWorks technology that fully exploits the ever-improving CPUs in personal computers to give customers superior CNC performance. Soft CNC technology eliminates the need for a motion control coprocessor card. The multi-axis servo loops are entirely closed in the CPU and provide extremely fast and accurate motion control. The end result is a highly flexible, low cost control system, with exceptional features that traditional PC-based controllers (still requiring motion control boards) cannot provide.

Soft Servo's soft CNC technology enables customers to build their own products without depending on the proprietary information and black box technology provided by NC vendors. We believe that machine tool builders know the real needs in their fields much better than NC vendors. Our soft motion technology allows users to implement their unique product concepts and use their valuable know-how to build the best possible CNC products. Let Soft Servo's PC-based motion control help you to achieve the ultimate flexibility and intelligence in building your CNC system.

Soft Servo Systems' Mission:

- To provide high-performing yet affordable and reliable CNC solutions to industrial machine builders and other users by exploiting the high-speed, ever-improving CPUs of personal computers.
- To revolutionize motion control for the manufacturing industry by leveraging and integrating the latest developments in information and software technologies.

Consult the [ServoWorks CNC Product Parts List](#) or your Soft Servo Systems sales representative regarding standard and optional features for these products.



Revised Jan 27, 2015

465 Waverley Oaks Rd. Suite 210

Waltham, MA 02452 USA

Tel: 1.781.891.9555

Fax: 1.781.891.3853

www.softservo.com

Send inquiries to: info_usa@softservo.com

© Copyright 2015 Soft Servo Systems, Inc.

LadderWorks, Motion Engine, MotionLite, PLC Engine, ServoWorks, ServoWorksCNC, ServoWorksPLC, SoftServo, SMP and VersioBus are trademarks of Soft Servo Systems, Inc. RTX is a registered trademark of IntervalZero, Inc. Realtime Express and Panasonic are registered trademarks of Matsushita Electric Industrial Co., Ltd. MECHATROLINK is a registered trademark of YASKAWA ELECTRIC CORPORATION.

Microsoft, Windows XP and Windows 7 are registered trademarks of Microsoft Corporation. Pentium is a registered trademark of Intel Corporation. All other trademarks are properties of their respective owners.